

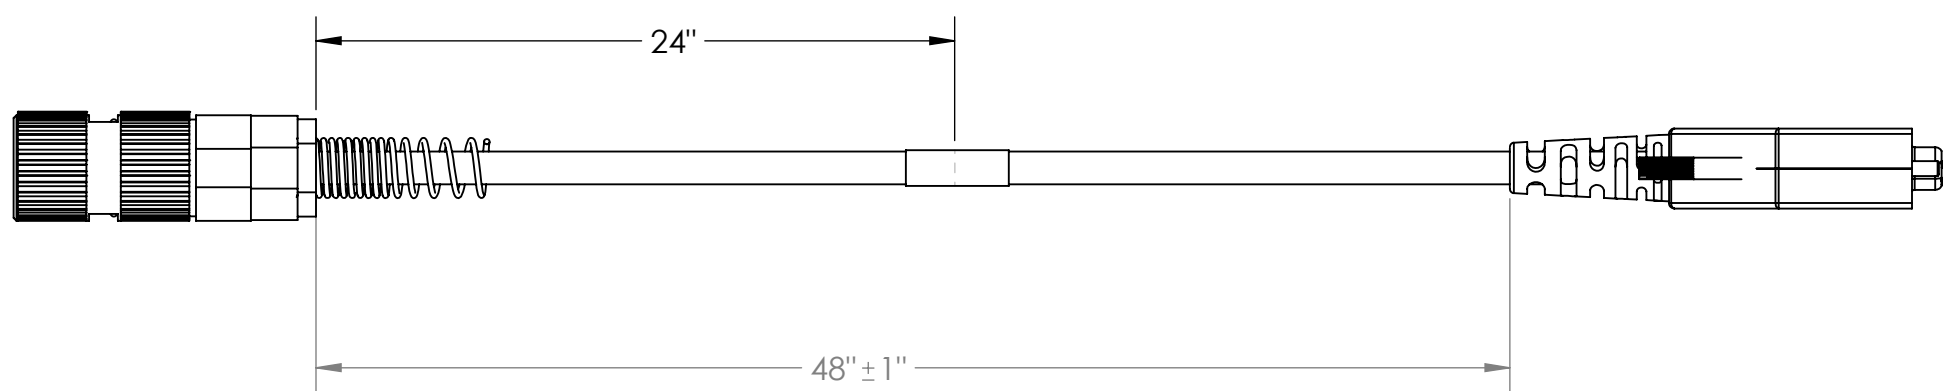

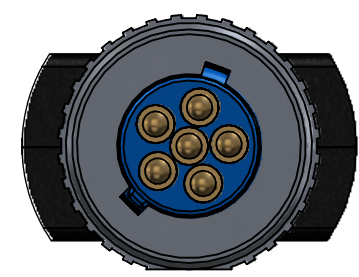


8 7 6 5 4 3 2 1

DETAIL B
SCALE 2 : 0.75

REV	DATE	DESCRIPTION OF CHANGE	ENG
A	10/10/14	INITIAL RELEASE	TC

DETAIL A
SCALE 2 : 1.2

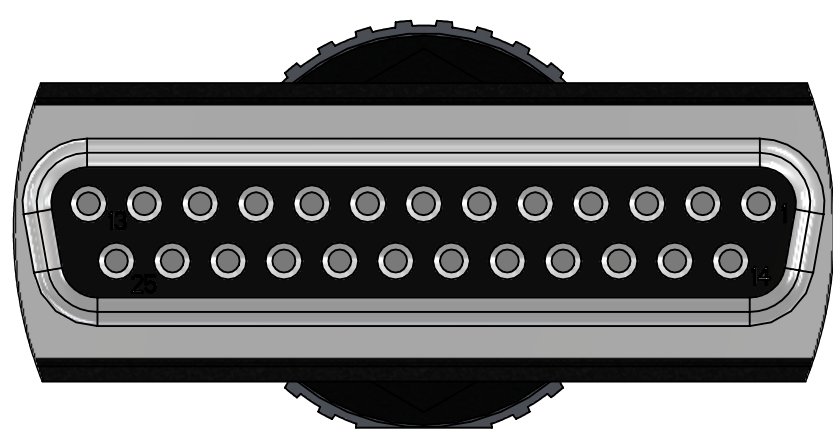

NOTES:

1. CABLES: ITEM 1:22 AWG, 6 CONDUCTOR,OD: 0.230 NOMINAL. POLYURETHANE INSULATION. OUTER SHIELD 38 AWG, TIN PLATED COPPER BRAID, 90% COVERAGE.
2. OVERMOLD MATERIAL: 90A POLYETHER-TYPE THERMOPLASTIC POLYURETHANE (TPU).
3. JACKET: BLACK MATTE FINISH.
4. SOLDERING IAW IPC-J-STD-001 CLASS II AS APPLICABLE.
5. CABLE ASSEMBLIES TO BE 100% TESTED FOR CONTINUITY, SHORTS AND INSULATION RESISTANCE (250V @100MOHM MINIMUM)
6. IDENTIFICATION: INDENTIFY ON PART THE FOLLOWING INFORMATION FOR EACH PART DELIVERED. UOS PART MARKING ON THE WIRE IS PROHIBITED:
PN: SN-1004 REV X (REV MARKING PER PO)
CAGE CODE: 1HJX9
DATE OF MFGR: MM/YY
 USE ADHESIVE LABEL, WHITE WITH BLACK FONT.
8. REFERENCE SUPPLYNET FILE NUMBER SN0325.
9. MANUFACTURE AND INSPECT IAW IPC/WHMA A-620 CLASS 2.
10. COVER SOLDERED CONNECTIONS WITH SHRINK TUBING.

UNLESS OTHERWISE SPECIFIED:	NAME	DATE
DIMENSIONS ARE IN: INCHES	DRAWN	TC 10/03/14
TOLERANCES: .XX: ± 0.03	CHECKED	RJB 10/03/14
.XXX: ± 0.005	COMMENTS:	
ANGULAR: .X°: 1°	PROPRIETARY AND CONFIDENTIAL	
.XX°: 0.5°	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SUPPLYNET, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SUPPLYNET INC. IS PROHIBITED.	
BREAK EDGES: .005 - .020	CAGE CODE: 1HJX9	
FILLETS: .005 - .020	DO NOT SCALE DRAWING	
SURFACE FINISH:		
GEOMETRIC TOLERANCING PER: ASME Y14.5-2009		
MATERIAL: SEE DRAWING NOTES		
FINISH: SEE DRAWING NOTES		

PART NUMBER: SN-1004

TITLE:
STU-III / STE cable Length 6 Feet

Cross reference to:
L-3 # 36021523 or
Sypris # 36031523-1STU

SIZE	DWG. NO.	REV
B	SN-1004	A

SCALE: NA WEIGHT: SHEET 1 OF 1

8 7 6 5 4 3 2 1